

COBALT PENDANT DIRECT LUMINAIRE



MATERIAL

Aluminum Extrude, Electrostatic Powder Coating
COVER: Steel Plate & Lens

STANDARD COLORS

White, Gray, Black

SOURCE INFORMATION

WATTAGE	25W
INPUT VOLTAGE	120VAC-277VAC
CRI	90
COLOR TEMP	2700K/3000K/3500K/4000K
OPERATING TEMP	-4 to +104 °F


TYPE OF LED

SMD


WARRANTY

50 000 hours at 77 °F

DIMENSIONS

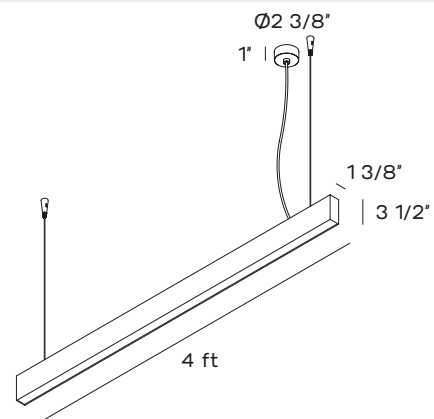

PHOTOMETRICS

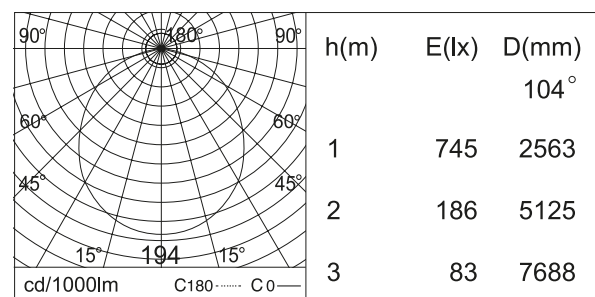

Fixture type:

Job information:



PRODUCT DEFINITION SHEET

1	2	3	4	5	6
7	8	9	10	11	

1	2	3	4	5	6
SERIES	MOUNTING	WATTAGE	LUMEN OUTPUT	COLOR TEMP	FINISH
☐ CBTD	☐ DS Suspended	☐ 25W	☐ 1900 lm	☐ 90 CRI ☐ 27K ☐ 30K ☐ 35K ☐ 40K	☐ W White ☐ G Grey ☐ B Black ☐ C Custom Custom powder coat color matching is available for a setup fee. Consult Mercury Lighting for additional information.

7	8	9	10
BEAM ANGLE	DRIVER	VOLTAGE	HANGING ACCESSORIES
☐ 104°	☐ V010-1 0-10V, dim to 1% For other dimming options contact Mercury	☐ UNIV 120VAC-277 VAC	☐ SC Standard

11
OPTION
☐ MC Magnetic Connect Type
☐ NO None